



Stationary concrete pump

BSA 1005 D5 BSA 1005 E

Output up to 52 m³/h Delivery pressure up to 70 bar

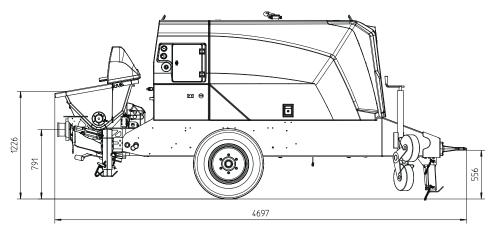



Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1005 D5	BSA 1005 E
Material number		102682.000	102683.000
Output	m³/h	52	47
Delivery pressure	bar	70	
Delivery cylinder	Ø mm	180	
Delivery cyl. stroke	mm	1000	
Strokes / minute		33	31
Engine / motor power	kW	55.4	45
Hopper		RS 488	
Capacity	1	approx. 300	
Filling height	m	1.23	
Transfer tube		S 1812	
Line connection	mm	SK 125	
Pressure connection	п	5.5	
Control system		Ergonic 3 PS	
Diesel tank	I	120	_
Weight	kg	2900	3100

Serial equipment

Agitator safety switch off	Grill 60 mm
Cable remote control 10 m	Operating m
Central lubrication on hopper	1× CD-ROM
with grease gun	Output adjus
Chassis F8	Outriggers 3
Cleaning accessories	Speed drawd
Coloring:	pump stop (E
Pump, frame, roof anthracite-grey	Splash guard
Doors chrome yellow	Support whe
Concrete hopper with agitator	Tool set incl.
Drive diesel, Deutz 55.4 kW, Stage 5 (1005 D5)	Tow coupler,
Drive electric, 45 kW, iE03 (1005 E)	
Electronic error management	
Ergonic Graphic Display	
Flushing water pump 50 l/min 20 bar	

Operating manuals (1× paper, 1× CD-ROM) spare part list
Output adjustment, electrical
Outriggers 3× mech.
Speed drawdown automatically on pump stop (Diesel driven only)
Splash guard
Support wheel
Tool set incl. standard equipment
Tow coupler, DIN eye

All data maximum theoretical

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@putzmeister.com Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 2010